

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

PORTIONS OF THE SOUTH, EAST, AND WEST BOUNDARIES,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 3, 5, 6, 17, 19, 20, 21,

22, 26, 27, 28, 29, 31, 33, 34, 35

IN

TOWNSHIP 27 SOUTH, RANGE 10 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved ***June 12, 2012***, which provided for the surveys included under Group Number ***1198***, and Assignment Instructions dated ***June 12, 2012***.

Survey Commenced, ***June 25, 2012***
Survey Completed, ***July 27, 2012***

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

FIELD NOTES

OF

THE DEPENDENT RESURVEY OF

PORTIONS OF THE SOUTH, EAST, AND WEST BOUNDARIES,

A PORTION OF THE SUBDIVISIONAL LINES,

AND

THE SUBDIVISION OF SECTIONS 3, 5, 6, 17, 19, 20, 21,

22, 26, 27, 28, 29, 31, 33, 34, 35

IN

TOWNSHIP 27 SOUTH, RANGE 10 WEST,

OF THE SALT LAKE MERIDIAN
IN THE STATE OF UTAH

EXECUTED BY

Jeremy D. Davis
Cadastral Surveyor

Under Special Instructions dated and approved ***June 12, 2012***, which provided for the surveys included under Group Number ***1198***, and Assignment Instructions dated ***June 12, 2012***.

Survey Commenced, ***June 25, 2012***
Survey Completed, ***July 27, 2012***

INDEX DIAGRAM

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

6	48 5 47	40 4	33 3 32	25 2	1
7	8 47	39 9	10	11	21 12 12 21
18	17 46	16 39	15 31	14	20 13 12 20
16 19 44	45 20 44	37 21 37	30 22 29	24 23 23	19 24 11 19
15 30 43	43 29 42	36 28 35	28 27 27	23 26 23	18 25 10 18
13 31 8	41 32 8	34 33 6	25 34 5	22 35 5	36 9 4

The Subdivision of Section 3.....	Page 49
The Subdivision of Section 5.....	Page 52
The Subdivision of Section 6.....	Page 55
The Subdivision of Section 17.....	Page 56
The Subdivision of Section 19.....	Page 58
The Subdivision of Section 20.....	Page 60
The Subdivision of Section 21.....	Page 62
The Subdivision of Section 22.....	Page 64
The Subdivision of Section 26.....	Page 65
The Subdivision of Section 27.....	Page 66
The Subdivision of Section 28.....	Page 67
The Subdivision of Section 29.....	Page 68
The Subdivision of Section 31.....	Page 69
The Subdivision of Section 33.....	Page 70
The Subdivision of Section 34.....	Page 72
The Subdivision of Section 35.....	Page 74

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

The following field notes are those of the dependent resurvey of portions of the south, east, and west boundaries, a portion of the subdivisional lines, and the subdivision of sections 3, 5, 6, 17, 19, 20, 21, 22, 26, 27, 28, 29, 31, 33, 34, and 35, in T. 27 S., R. 10 W., Salt Lake Meridian, Utah.

HISTORY OF SURVEYS

Surveyed by	Retr. or Resurveyed by
-------------	------------------------

SOUTH BOUNDARY

Portion J. Bausman	1870		
All T.C. Bailey	1881	T.C. Bailey	1881
Portion		J.W. Dougall	1910

EAST BOUNDARY

All T.C. Bailey	1881		
All		J.W. Dougall	1910
Portion		L.V. Judd	1996

WEST BOUNDARY

All J. Bausman	1870		
All		T.C. Bailey	1881
All		J.W. Dougall	1911
Portion		J.D. Davis	2012

NORTH BOUNDARY

Portion J. Bausman	1870		
All T.C. Bailey	1881	T.C. Bailey	1881
Portion		J.W. Dougall	1911
Portion		L.V. Judd	1996
Portion		M.J. Kurchinski	2011

SUBDIVISION

Portion J. Bausman	1870		
Portion J.W. Dougall	1911	J.W. Dougall	1911
Portion		L.V. Judd	1996
Portion		J.D. Davis	2012

COUNTY SURVEYS

Beaver County has monumented numerous corners throughout the township, with Corner Perpetuation and Filing Records/Land Survey Monument Records, along with a "Road Right of Way Map" signed and stamped January 10, 2001, and a "Beaver County Township Map" signed and stamped on August 8, 2011, by Douglas B. Grimshaw, Utah Registered Professional Land Surveyor No. 174457 and designated Beaver County Surveyor, on file in the Beaver County Recorder's Office.

PRIVATE SURVEYS

A survey described as a survey for the "Level 3 regeneration site in section 16" was executed by Thomas W. Harvey, Utah Registered Professional

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

PRIVATE SURVEYS CONTINUED

Land Surveyor No. 3824, Electrical Consultants Inc., with a survey plat signed and stamped on July 30, 1999, obtained from Douglas B. Grimshaw, Utah Registered Professional Land Surveyor No. 174457. A copy will be kept with the Cadastral Survey Group File for this survey.

An unrecorded draft copy of a "CERTIFICATE OF SURVEY" prepared for Milford Wind Corridor, representing surveys made from 2008 to 2011, by Scott A. Gyllen, Utah Registered Land Surveyor No. 6763499, in part of Townships 25, 26, and 27 South, Ranges 9 and 10 West, was obtained from Westwood Professional Services, Inc. A copy will be kept with the Cadastral Survey Group File for this survey.

A survey represented on the "ALTA/ACSM LAND TITLE SURVEY for Adelphia Business Systems", located in section 16, Township 27 South, Range 10 West, was made by Douglas B. Grimshaw, Utah Registered Professional Land Surveyor No. 174457, signed and stamped on August 24, 2000, and filed at the Beaver County Recorder's Office.

A survey represented on the "ALTA SURVEY for Martin Marietta Materials, Inc. & Martin Marietta Materials Real Estate Investments, Inc.", located in Township 27 South, Ranges 10 and 11 West, was made by Douglas B. Grimshaw, Utah Registered Professional Land Surveyor No. 174457, and dated June 9, 2009. A copy will be kept with the Cadastral Survey Group File for this survey.

A survey represented on the "RECORD OF SURVEY MAP for Kent Smith", located in section 18, Township 27 South, Range 10 West, was made by Douglas B. Grimshaw, Utah Registered Professional Land Surveyor No. 174457, signed and stamped on April 15, 2009, and filed at the Beaver County Recorder's Office.

A survey described as the "TWIN MOUNTAIN ROCK RAILROAD RIGHT OF WAY SURVEY", located in sections 12 and 13, Township 27 South, Range 11 West, and sections 4, 5, 6, and 7, Township 27 South, Range 10 West, was made by Kary B. Monroe, Utah Registered Professional Land Surveyor No. 164561, signed and stamped on May 13, 1997, and filed at the Beaver County Recorder's Office.

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

Note: Certain corners within this township were perpetuated with iron pipe, 2 inches diameter, set by unknown individuals. These pipes were accepted as careful and faithful perpetuations of the original corner points. Similar pipe were also accepted by Beaver County Surveyor Douglas B. Grimshaw. Certain General Land Office iron posts were found badly decayed and were reset, in concrete, at their original position by Douglas B. Grimshaw.

The survey was executed in accordance with the specifications set forth in the Manual of Surveying Instructions, 2009, and the Special Instructions for Group No. 1198, dated June 12, 2012.

The directions of the lines were determined by references to true meridians, established by Global Positioning System (GPS) utilizing Real-Time Kinematic (RTK) techniques throughout the survey. The positional accuracy of this survey complies with the *Standards and Guidelines for Cadastral Surveys Using Global Positioning System Methods*, dated May 9, 2001, Version 1.0. Trimble model 5800 GPS receivers were used for field collection. Cadastral Measurement Management (CMM) software was the primary software utilized for project calculations.

Preliminary to the resurvey, the lines of the prior surveys were retraced and a search was made for all corners and other calls of record. Identified corners were remonumented in their original positions. Lost corners were reestablished and remonumented at proportionate positions based on the official record. The retracement data was thoroughly verified and only the true line field notes are given herein.

Geodetic control was derived from GPS static observations; post processed by National Geodetic Survey, Online Positioning User Service (OPUS), utilizing Continuously Operating Reference Stations (CORS); NVPI PIOCHE CORS ARP, MARYSVALE_UT2006 CORS ARP, ECHO ECHO_BRGN_NV1999 CORS ARP, NAD_83(2011) (EPOCH: 2010.00).

The geographic position of the 1/4 section corner of section 6 and section 31, Townships 26 and 27 South, Range 10 West, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°29'59.002" N.**,
 Longitude: **113°01'08.673" W.**, N.A.D. 83(2011), EPOCH 2010.00
 Network Accuracy = 0.200 meter at 95% confidence

The geographic position of the corner of Townships 27 and 28 South, Ranges 9 and 10 West, as determined by direct RTK methods from the National Geodetic Survey OPUS solution, is as follows:

Latitude: **38°24'43.153" N.**,
 Longitude: **112°55'01.380" W.**, N.A.D. 83(2011), EPOCH 2010.00
 Network Accuracy = 0.200 meter at 95% confidence

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Dependent Resurvey of a Portion of the South Boundary
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

The Reestablishment of the Survey Executed by T.C. Bailey in
1881, and the Resurvey Executed by J.W. Dougall in 1910.

Beginning at the corner of Townships 27 and 28 South, Ranges 9 and 10 West, monumented with a Beaver County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with aluminum cap marked, Beaver County Survey Monument LS 174457 T27S R10W R9W S1 S6 S31 S36 T28S 2007.

Found a granite stone, 28x14x6 inches and marked with 6 grooves on 4 sides, half buried on south side of the aluminum post.

A steel fence post is located 1.0 lks. west of the aluminum post.

A mound of stone, 2 ft. base, is located northwest of the aluminum post.

This position is accepted as a careful and faithful perpetuation of the original corner position.

Corner is located 1.4 lks. south of a barbed-wire fence line, extending east and west, on nearly flat ground, in native grass and plants.

N. 89°58.3' W., between sections 1 and 36.

39.957 The 1/4 section corner of sections 1 and 36, monumented with an iron post, 1 inch diameter, firmly set, projecting 9 inches above ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Found quartzite stone, 10x10x4 inches, dimly marked 1/4 on face, alongside the iron post.

Corner is located 25.8 lks. east of Ranch Canyon Road, in the west end of a barbed-wire fence line, extending east and west, where the fence line meets an orange panel gate, in an area of gently rolling ground.

N. 89°48.2' W., beginning new measurement.

40.136 The corner of sections 1, 2, 35, and 36, monumented with an iron post, 3 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Corner is located 0.8 lks south of a barbed-wire fence line, extending east and west and having tumbleweed piled along it, in

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

area of gently rolling ground, in mixed grasses and plants.

From the 1/4 section corner of sections 2 and 35, monumented with an iron post, 1 inch diameter, firmly set, 1 inch below grade, with brass cap marked without sections.

Add the marks "35" and "2" to the brass cap marked

S35
1/4
—●—
S2
1910

A steel fence post is located alongside the iron post.

Corner is located in a barbed-wire fence line, extending east and west, with sand and tumbleweed drifted and piled halfway up the fence, in thick mixed grasses and tumbleweed.

N. 89°56.6' W., between sections 2 and 35.

- 40.010 The corner of sections 2, 3, 34, and 35, monumented with an iron post, 3 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Corner is located 1.5 lks. south of a corner of barbed-wire fences, extending north and east, on gently rolling ground, in thick cheat grass.

The Reestablishment of the Surveys Executed by J. Bausman in 1870, T.C. Bailey in 1881, and the Resurvey Executed by J.W. Dougall in 1910.

N. 89°55.0' W., between sections 3 and 34.

- 19.996 Point for the E 1/16 section corner of sections 3 and 34.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
S34
E 1/16 —
S3
T28S
2012

Set a steel fence post alongside, and buried a magnet beneath the aluminum post.

Raise a mound of stone, 1 ft. base, around the aluminum post.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner is located on gently rolling land, in scattered mixed plants.

- 39.992** The 1/4 section corner of sections 3 and 34, monumented with an iron post, 1 inch diameter, firmly set, flush with the ground surface, with brass cap marked as described in the official record of the 1911 resurvey with a steel fence post alongside, along with an embedded mound of stone, 1 ft. base.

Rehabilitate mound of stone, 1 ft. base, around the iron post.

Corner is located in gently rolling land, in mixed brush, grasses, and plants.

The Reestablishment of the Surveys Executed by
J. Bausman in 1870 and T.C. Bailey in 1881.

From the corner of sections 3, 4, 33, and 34, monumented with an iron post, 3 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Corner is located 13.6 lks. south of the south edge of a small wash that snakes southwesterly through the area, in sagebrush and cheat grass.

S. 89°45.0' W., between sections 4 and 33.

- 20.507** Point for the E 1/16 section corner of sections 4 and 33.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
S33
E 1/16 ———
S4
T28S
2012

Set a steel fence post alongside, and buried a magnet beneath the aluminum post.

Found an old and decayed wood post of unknown origins, 22 inches long, 5 inches in diameter, firmly set and leaning westerly, projecting 11 inches above ground, S. 59° W., 1.5 lks. distance from point for the E 1/16 section corner of sections 4 and 33. This was not utilized in the execution of this survey.

Corner is located on gently rolling land, in scattered brush and plants.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

- 41.014** The 1/4 section corner of sections 4 and 33, monumented with a granite stone, 17x6x7 inches, firmly set, marked 1/4 on the north face.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, flush with the ground, with aluminum cap marked

T27S R10W
S33
1/4 —————
S4
T28S
2012

Set a steel fence post alongside, and buried a magnet beneath the aluminum post.

An iron pipe of unknown origin, 2 inches diameter, firmly set, projecting 1/4 inch above ground is located 0.8 lks northeasterly of the aluminum post.

Corner is located on nearly level ground, in grasses and greasewood.

N. 89°46.2' W., beginning new measurement.

- 19.985** The W 1/16 section corner of sections 4 and 33, monumented with a rebar of unknown origin, 1/2 inch diameter, 18 inches long, firmly set flush with the ground.

This position is accepted as a careful and faithful determination of the corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T27S R10W
S33
W 1/16 —————
S4
T28S
2012

Set a steel fence post alongside, and buried rebar and a magnet beneath the aluminum post.

Corner is located 0.8 lks. southwest of a corner of barbed-wire fences, extending north and west, on generally flat ground, in scattered sagebrush and heavy plants.

- 39.970** The corner of sections 4, 5, 32, and 33, monumented with an

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

unrecorded Bulloch Brothers iron pipe, 2 inches diameter, firmly set, projecting 5 inches above the ground, with 3 1/2 inch diameter brass cap marked, 32, 33, 5, 4, BB, 1981.

This position is accepted as a careful and faithful perpetuation of the original corner position.

Corner is located 3 inches north of a corner of barbed-wire fences, extending south and east, 1.9 lks. east of a wood power pole, on nearly level land.

From the 1/4 section corner of sections 6 and 31, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, 1 inch below grade, with brass cap marked, Beaver County Survey Monument LS 174457 T27S R10W 1/4 S31 S6 T28S 1998, with a steel fence post alongside.

This position is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located 7.3 lks. south of a barbed-wire fence line, extending east and west, and 2.3 lks. west of a 4-strand barbed-wire fence line, extending north and south, near horse corrals and on the west edge of a graveled dirt road.

From this point the corner of sections 5, 6, 31, and 32, bears N.89°58.9'E., 40.295 chains distance, monumented with a Beaver County survey monument, a brass cap, firmly set 2 1/2 inches below asphalt grade of State Highway 257, and illegibly marked.

This position is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located 4.0 lks. west of yellow centerline striping, below pavement grade of State Highway 257.

S.89°58.3' W., between sections 6 and 31.

Point for the W 1/16 section corner of sections 6 and 31.

20.147

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
S31
W 1/16 ———
S6
T28S
2012

Set a steel fence post alongside, and buried a magnet beneath the aluminum post.

Raise a mound of earth and gravel, 3 ft. base, to bottom of cap.

DEPENDENT RESURVEY OF A PORTION OF THE SOUTH BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner is located on west edge of a two-track dirt road, extending north and south, north of where said two-track dirt road intersects a well maintained gravel road, extending east and west, and the southwest corner of barbed-wire fences, extending north and east, of the Milford Trap Club bears N. 75° E., 27.2 lks. distance.

- 40.294** The corner of Townships 27 and 28 South, Ranges 10 and 11 West, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 3 inches above concrete, with brass cap marked, Beaver County Survey Monument LS 174457 T27S R11W R10W S36 S31 S1 S6 T28S 1996.

This position is accepted as a careful and faithful reestablishment of the original corner position.

A steel fence post is located alongside the galvanized steel post.

Corner is located 0.6 lks. west of west edge of graveled dirt road, in cheat grass.

Dependent Resurvey of a Portion of the East Boundary
Township 27 South Range 10 West, Salt Lake Meridian, Utah.

The Reestablishment of the Survey Executed by T.C. Bailey in 1881, and the Resurvey Executed by J.W. Dougall in 1910.

From the corner of Townships 27 and 28 South, Ranges 9 and 10 West, hereinbefore described.

- 39.769** The 1/4 section corner of sections 36 and 31, monumented with an iron post, 1 inch diameter, firmly set, projecting 5 inches above ground, with brass cap marked as described in the official record of the 1910 resurvey, with a steel fence post alongside.

The original stone, 9x11x6 inches, marked 1/4 on face, lying face down, is located alongside the iron post.

from which the original bearing tree

A juniper, 8 inches diameter, bears N. 45° E., 1.36 chains distance, with an open blaze and no visible scribes, (Record 1.25 chains).

No remaining evidence of the northwest bearing tree was found.

Corner is located near base of a ridge, extending east and west, on a south slope, 2.7 lks. north of an old two-track dirt road, extending southwesterly and northeasterly.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

N. 0°11.3' W., beginning new measurement.

- 39.944** The corner of sections 25, 30, 31, and 36, monumented with an iron post, 3 inches diameter, firmly set, projecting 9 inches above the ground, with brass cap marked as described in the official record of the 1910 resurvey, with a steel fence post alongside.

Corner is located in gently rolling hills, on the north end of a large stand of juniper trees, in heavy cheat grass and mixed, scattered green plants.

N. 0°01.7' E., between sections 25 and 30.

- 39.967** Point for the 1/4 section corner of sections 25 and 30, at proportionate distance;

The original iron post, 1 inch diameter, 32 inches long and decayed at the base, was found lying loosely on top of the ground, with brass cap marked as described in the official record of the 1910 resurvey.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S
R10W R9W
1/4
S25 | S30
2012

Set a steel fence post and deposit the iron post inverted alongside, and buried a magnet at the base of the aluminum post.

From this corner point, a rebar of unknown origin, 3/4 inch diameter, firmly set, projecting 6 1/2 inches above the ground, with 1 1/2 inch diameter aluminum cap attached and marked 173, N. 86°16.5' E., 81 links distance.

Corner is located on gently rolling land, in cheat grass and mixed plants.

- 79.934** The corner of sections 19, 24, 25, and 30, monumented with an iron post, 3 inches diameter, firmly set, projecting 11 inches above the ground, with brass cap marked as described in the official record of the 1910 resurvey.

The original corner, a granite stone, 12x8x5 inches, with two notches on edge and one groove on face, is located alongside.

A mound of stone, 2 ft. base by 1 ft. high is located west of the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a steel fence post alongside the iron post.

A USGS brass cap, 2 1/4 inches diameter, set flush in a column of concrete, 6 inch diameter and projecting 3 inches above the ground, with brass cap marked, USGS WASH, bears S. 22°35.3' W., 6 lks. distance.

Corner is located on rolling hills, in heavy bunch grass with other native plants scattered in area.

N. 0°00.9' E., between sections 19 and 24.

- 39.989 The 1/4 section corner of sections 19 and 24, monumented with an iron post, 1 inch diameter, firmly set, projecting 14 inches above ground, with brass cap marked as described in the official record of the 1910 resurvey, with a steel fence post alongside.

Raise mound of stone, 2 ft. base, to cap.

Corner is located in middle of a large draw, extending northwesterly and southeasterly, in very thick cheat grass with a few other scattered native plants.

N. 0°04.6' E., beginning new measurement.

- 39.980 The corner of sections 13, 18, 19, and 24, monumented with an iron post, 3 inches diameter, firmly set, projecting 15 inches above the ground, with brass cap marked

0161	
T27S	
R10W	R9W
<u>S18</u>	<u>S13</u>
S19	S24

Remark brass cap to read

0161	
T27S	
R10W	R9W
<u>S13</u>	<u>S18</u>
S24	S19
2012	

Set a steel fence post alongside the iron post.

A mound of stone, 2.5 ft. base by 9 inches high is located west of the iron post.

Rebuild mound of stone, 2 ft. base by 16 inches high, west of the iron post.

Corner is located in gently rolling land, on nearly flat ground, in cheat grass and mixed native plants.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

N. 0°01.9' E., between sections 13 and 18.

- 39.978** Point for the 1/4 section corner of sections 13 and 18, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S
R10W R9W
1/4
S13 | S18
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

From this corner point, a rebar of unknown origin, 3/4 inch diameter, firmly set, with a 1 1/4 inch diameter PVC pipe set over top of the rebar, projecting 47 inches above the ground, N. 63°02.2' W., 35 lks. distance.

Corner is located 1.1 lks. west of the westerly track of an old and faint two-track dirt road, extending northerly and southerly, on gently rolling land, in thick cheat grass and mixed brush.

- 79.956** The corner of sections 7, 12, 13, and 18, monumented with an iron post, 3 inches diameter, firmly set, in a scattered mound of stone, 4 ft. base, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1910 resurvey, with a steel fence post and a kinked length of 3/4 inch tubing, both leaning at angles to the east, alongside.

Rebuild mound of stone, 4 ft. base, to the cap.

Corner is located in gently rolling lands, in the center of an old two-track dirt road, extending northerly and southerly, in thinly spread bunch grass and mixed native plants.

N. 0°02.5' E., between sections 7 and 12.

- 39.978** The 1/4 section corner of sections 7 and 12, monumented with a Westwood Professional Services survey monument, a 3/4 inch rebar, with an aluminum cap, 2 1/2 inches diameter, firmly set, 4 inches below grade, with aluminum cap marked, WESTWOOD PROFESSIONAL SERVICES 2008 T27S 1/4 S12 S7 R10W R9W LS 6763499.

This position is accepted as a careful and faithful reestablishment of the original corner position.

DEPENDENT RESURVEY OF A PORTION OF THE EAST BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

While digging in search of evidence, the Westwood aluminum cap was unintentionally removed from the rebar. On account of this, attached a BLM aluminum cap, 3 1/4 inches diameter, to the found rebar, with aluminum cap marked

T27S
R10W R11W
1/4
S12 | S7
2012

Deposit Westwood aluminum cap alongside the monument.

Place a collar of stone, 1 ft. base, to cap, and set a steel fence post 1/2 ft. north of the monument.

Corner is located 4 inches below grade, on the west track of a two-track dirt road, extending northerly and southerly, on gently rolling land, in cheat grass and mixed brush.

N. 0°02.5' E., beginning new measurement.

- 39.978** The corner of sections 1, 6, 7, and 12, monumented with an iron post, 3 inches diameter, firmly set, projecting 9 inches above the ground, with brass cap marked as described in the official record of the 1910 resurvey, with a steel fence post alongside.

A mound of stone, 2 ft. base, to cap, is located west of the iron post.

Corner is located at gate panel, in a barbed-wire fence line, extending east and west, on gently rolling, in cheat grass and mixed native plants.

Dependent Resurvey of a Portion of the West Boundary
Township 27 South Range 10 West, Salt Lake Meridian, Utah.

The Reestablishment of the Survey Executed by J. Bausman in 1870, and the Resurveys Executed by T.C. Bailey in 1881, and J.W. Dougall in 1911.

From the corner of Townships 27 and 28 South, Ranges 10 and 11 West, hereinbefore described.

N. 0°23.3' E., between sections 31 and 36.

- 40.311** The 1/4 section corner of section 31 only, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set in concrete, projecting 1 inch above the ground, with brass cap marked, Beaver County Survey Monument LS 174457 T27S 1/4 S31 R11W R10W 1998.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

This position is accepted as a careful and faithful reestablishment of the original corner position.

A steel fence post is located alongside the galvanized steel pipe.

Corner is located S. 6° W., 56.1 lks. distance from a corner of fences, extending north and east, on nearly level ground, with heavy sagebrush in area.

N. 1°14.6' W., beginning new measurement.

- 3.361** The 1/4 section corner of section 36 only, Township 27 South, Range 11 West, monumented with an embedded mound of stone, 3 ft. base, with an iron post, 1 inch diameter, 30 inches long and bent at a 90° angle near the top quarter of the post, lying on top of the ground, 3 ft. south of the center of the mound of stone, with a brass cap marked as described in the official record of the 1911 resurvey.

Accept center of the mound of stone as the best available evidence of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S
R11W R10W
1/4
S36 |
2012

Deposit the iron post, set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Raise a mound of stone, 2 ft. base, to top of aluminum cap.

Corner is located 4.8 lks. west of a fence line, extending north and south, and 13.0 lks. east of the east edge of a two-track dirt road, on gently rolling land, in heavy sagebrush.

N. 0°16.2' E., beginning new measurement.

- 37.197** The corner of sections 30 and 31 only, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set in concrete, projecting 3 inches above the ground, with brass cap marked, Beaver County Survey Monument LS 174457 T27S R11W R10W S30 CC S31 1996, with a steel fencepost alongside.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

This position is accepted as a careful and faithful perpetuation of the original corner position.

Found a granite stone, 23x11x5 inches, marked with 5 notches and 1 notch on edges, lying loose on top of the ground, 10 ft. south of the galvanized steel pipe.

Deposit the marked stone along the south side of the galvanized steel post.

Corner is located 6.3 lks. northwest of a corner of fences, extending south and east, and 9.1 lks. southeast of the easterly edge of the east fork of a dirt road that "Y's" in the proximate area.

N. 0°11.2' E., beginning new measurement.

- 2.857 The corner of sections 25 and 36 only, Township 27 South, Range 11 West, monumented with an iron post, 2 inches diameter, firmly set, projecting 11 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Found an embedded mound of stone, 2 ft. base, west of the iron post.

Rehabilitate mound of stone to be 2 ft. base by 1 ft. high.

Corner is located 12.1 lks. west of the westerly edge of a dirt road, extending northerly and southerly, on nearly level ground, in heavy sagebrush.

N. 0°04.5' E., beginning new measurement.

- 37.482 The 1/4 section corner of section 30 only, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set in concrete, projecting 1 inch above the ground, with aluminum cap marked, Beaver County Survey Monument T27S R11W R10W 1/4 S30 PLS 174457 2011, with a steel fence post alongside.

This position is accepted as a careful and faithful perpetuation of the original corner position.

A stone, 14x10x5 inches, clearly marked 1/4 on face, in a scattered mound of stone, 2.5 ft. base, alongside the west side of the galvanized steel pipe.

Deposit the marked stone along the west side of the galvanized steel pipe.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Raise a mound of stone, 2 ft. base by 1 ft. high, west of the galvanized steel pipe.

Corner is located on nearly level ground in thick sagebrush.

N. $0^{\circ}11.9'$ E., beginning new measurement.

- 2.533** The 1/4 section corner of section 25 only, Township 27 South, Range 11 West, monumented with an iron post, 1 inch diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Set a steel fence post alongside the iron post.

Corner is located 10.1 lks. west of the west edge of a two-track dirt road, extending northerly and southerly, on nearly flat ground in thick sagebrush.

N. $0^{\circ}10.2'$ E., beginning new measurement.

- 37.675** The corner of sections 19 and 30 only, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set in concrete, projecting 2 inches above the ground, with aluminum cap marked, Beaver County Survey Monument T27S R11W R10W S19 S30 PLS 174457 2011, with a steel fence post set alongside.

This position is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located 9.1 lks. west of a two-track dirt road, on nearly level ground in heavy sagebrush.

N. $0^{\circ}10.5'$ E., beginning new measurement.

- 2.342** The corner of sections 24 and 25 only, Township 27 South, Range 11 West, monumented with an iron post, 2 inches diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Corner is located 7.6 lks. west of a two-track dirt road, on nearly level ground, in heavy sagebrush.

N. $0^{\circ}03.1'$ E., beginning new measurement.

- 37.967** Point for the 1/4 section corner of sections 19 only, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE WEST BOUNDARY
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with aluminum cap marked

T27S
R11W R10W
1/4 | S19
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 1.1 lks. west of a two-track dirt road, on gently rolling ground, in dense sagebrush.

- 40.028** The 1/4 section corner of section 24 only, Township 27 South, Range 11 West, monumented with an iron post, 1 inch diameter, firmly set and bent southerly at a 45° angle, projecting 15 inches above the ground, with brass cap marked

S24 1/4 | S19
1911

Remove the marks "S19" and add the marks "2012" to the brass cap.

Due to the angle at which the iron post was bent, it was removed, straightened, and reset in the original corner position, 22 inches in the ground, with 14 inches projecting above the ground.

Raise a mound of stone, 2 ft. at base by 14 inches high around the iron post.

Corner is located 6.1 lks. west of the west edge of a two-track dirt road, in heavy sagebrush.

N. 0°01.8' E., beginning new measurement.

- 38.328** The corner of sections 18 and 19 only, monumented with an iron pipe, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with brass cap marked as described in the official record of the 2012 resurvey.

N. 0°15.5' W., beginning new measurement.

- 1.633** The corner of sections 13 and 24 only, Township 27 South, Range 11 West, monumented with an iron post, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with brass cap

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

marked as described in the official record of the 1911 resurvey

Dependent Resurvey of a Portion of the Subdivisional Lines
Township 27 South Range 10 West, Salt Lake Meridian, Utah.

The Reestablishment of the Survey Executed by
J.W. Dougall in 1911.

From the corner of sections 25, 30, 31, and 36, on the east
boundary of the township, hereinbefore described.

N. 89°48.3' W., between sections 25 and 36.

- 40.060 The 1/4 section corner of sections 25 and 36, monumented with an
iron post, 1 inch diameter, firmly set, projecting 5 inches
above the ground, with brass cap marked as described in the
official record of the 1911 survey, with a steel fence post
alongside.

Corner is located on gently rolling land, generally sloping
west, in mixed grasses and thinly spread brush.

N. 89°48.5' W., beginning new measurement.

- 39.975 The corner of sections 25, 26, 35, and 36, monumented with an
iron post, 2 inches diameter, firmly set, projecting 6 inches
above the ground, with brass cap marked as described in the
official record of the 1911 survey, with a steel fence post
alongside.

Corner is located on gently rolling land, in mixed native plants
and grasses and thinly scattered sagebrush.

N. 0°01.7' E., between sections 25 and 26.

- 40.006 The 1/4 section corner of sections 25 and 26, monumented with an
iron post, 1 inch diameter, firmly set, projecting 6 inches
above the ground, with brass cap marked as described in the
official record of the 1911 survey.

Set a steel fence post alongside the iron post.

Corner is located on nearly flat ground, in cheat grass and
mixed green plants.

N. 0°00.8' E., beginning new measurement.

- 39.980 The corner of sections 23, 24, 25, and 26, monumented with an

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

iron post, 2 inches diameter, firmly set, in a mound of stone, 3.5 ft. base by 7 inches high, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Corner is located 3.0 lks. south of a corner of barbed-wire fences, extending north and west, on gently rolling lands, in mixed native grasses and plants, and tumbleweed.

From the corner of sections 19, 24, 25, and 30, on the east boundary of the township, hereinbefore described.

N. $89^{\circ}44.8'$ W., between sections 24 and 25.

- 40.093** The 1/4 section corner of sections 24 and 25, monumented with an iron post, 1 inch diameter, firmly set, projecting 15 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with an embedded mound of stone to the north.

Raise a mound of stone, 2 ft. base to the brass cap.

Set a steel fence post alongside the iron post.

Corner is located in the middle of a draw, extending northeasterly and southwesterly, in mixed grasses and plants.

N. $89^{\circ}47.5'$ W., beginning new measurement.

- 39.936** The corner of sections 23, 24, 25, and 26.
-

N. $0^{\circ}00.1'$ W., between sections 23 and 24.

- 39.939** The 1/4 section corner of sections 23 and 24, monumented with an iron post, 1 inch diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Corner is located in a barbed-wire fence, extending north and south, on gently rolling land, in heavy grass, mixed native plants, and tumble weeds.

N. $0^{\circ}01.9'$ E., beginning new measurement.

- 39.952** The corner of sections 13, 14, 23, and 24, monumented with an iron post, 2 inches diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner is located in a barbed-wire fence, extending north and south, in thick grasses and tumbleweed.

From the corner of sections 13, 18, 19, and 24, on the east boundary of the township, hereinbefore described.

N. 89°52.2' W., between sections 13 and 24.

- 40.037 The 1/4 section corner of sections 13 and 24, monumented with an iron post, 1 inch diameter, firmly set, projecting 14 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Raise a mound of stone, 2 ft. base by 1 ft. high.

Corner is located on gently rolling land, in thick grasses and native mixed plants.

N. 89°46.7' W., beginning new measurement.

- 39.999 The corner of sections 13, 14, 23, and 24.
-

N. 0°01.4' E., between sections 13 and 14.

- 39.995 The 1/4 section corner of sections 13 and 14, monumented with a Westwood Professional Services survey monument, a 3/4 inch diameter rebar, firmly set, projecting 3 inches above the ground, with an aluminum cap, 2 1/2 inches diameter, attached and marked, WESTWOOD PROFESSIONAL SERVICES 2011 1/4 S14 S13 LS 6763499.

This position is accepted as a careful and faithful reestablishment of the original corner position.

At the corner position

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S	1/4	R10W
S14	S13	
2012		

Deposit Westwood rebar and cap inverted alongside and buried a magnet beneath the aluminum post.

Set a steel fence post set alongside the aluminum post.

Corner is located in a barbed-wire fence, extending north and south, in thick grasses and tumbleweed.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

N. 0°01.4' E., beginning new measurement.

- 39.997** The corner of sections 11, 12, 13, and 14, monumented with an iron post, 2 inches diameter, firmly set flush with a concrete cylinder, 8 inches diameter, 18 inches below ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Corner is located at the corner of barbed-wire fences, extending north, south, and west, surrounded with drifted sand and large piles of tumbleweed, on nearly flat land.

From the corner of sections 7, 12, 13, and 18, on the east boundary of the township, hereinbefore described.

N. 89°47.9' W., between sections 12 and 13.

- 40.015** Point for the 1/4 section corner of sections 12 and 13, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
S12
1/4 ———
S13
2012

Set a steel fence post alongside, and buried a magnet at the base of the aluminum post.

Raise a mound of stone, 2 ft. base to bottom of the aluminum cap.

Corner is located 35.8 lks. south of the center of the well maintained gravel road to Blundell Geothermal Power Plant.

- 80.030** The corner of sections 11, 12, 13, and 14.

N. 0°03.2' E., between sections 11 and 12.

- 39.992** The 1/4 section corner of sections 11 and 12, monumented with an iron post, 1 inch diameter, firmly set in an 8 inch diameter column of concrete, 10 inches below ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Corner is located in a barbed-wire fence line, extending north and south, with sand and tumbleweed drifted halfway up the fence line, on gently rolling land.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

N. 0°02.0' E., beginning new measurement.

- 39.979** The corner of sections 1, 2, 11, and 12, monumented with an iron post, 2 inches diameter, firmly set, in an 8 inch diameter column of concrete, 17 inches below ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Corner is located 3.7 lks. west of a corner of barbed-wire fences, extending north, south, and east, on gently rolling land, in native plants and grasses, and heavy tumbleweed.

From the corner of sections 2, 3, 34, and 35, on the south boundary of the township, hereinbefore described.

North, between sections 34 and 35.

- 39.954** The 1/4 section corner of sections 34 and 35, monumented with an iron post, 1 inch diameter, firmly set, projecting 2 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

Corner is located in a barbed-wire fence, extending north and south, 0.4 lks. northwest of a steel fence post in the fence line, on a gentle north slope, in small rolling hills, in native grasses and plants.

N. 0°01.2' W., beginning new measurement.

- 19.995** Point for the N 1/16 section corner of sections 34 and 35, not monumented.

- 39.990** The corner of sections 26, 27, 34, and 35, monumented with an iron post, 2 inches diameter, firmly set, 6 inches below ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Remove sand so the brass cap now projects 3 inches above the ground.

Found a steel fencepost set alongside the iron post.

Corner is located 1.5 lks. north of an intersection of fences, extending east, south, and west, on gently rolling land, in mixed native grasses and plants.

From the corner of sections 25, 26, 35, and 36.

N. 89°50.7' W., between sections 26 and 35.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

- 39.987** The 1/4 section corner of sections 26 and 35, monumented with an iron post, 1 inch diameter, firmly set, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Corner is located S. 67° E., 1.1 lks. distance from a corner of fences, extending north and west, in gentle rolling hills, in cheat grass and native plants.

N. 89°53.0' W., beginning new measurement.

- 39.933** The corner of sections 26, 27, 34, and 35.
-

From the 1/4 section corner of sections 26 and 27, monumented with an iron post, 1 inch diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Corner is located on nearly flat ground, in native grasses and plants.

N. 0°01.5' W., between sections 26 and 27.

- 40.004** The corner of sections 22, 23, 26, and 27, monumented with an iron post, 2 inches diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fencepost alongside.

Corner is located near the base of a small hill, on a south slope, on gently rolling lands, in cheat grass and green plants.

From the corner of sections 23, 24, 25, and 26.

N. 89°51.6' W., between sections 23 and 26.

- 39.978** The 1/4 section corner of sections 23 and 26, monumented with an iron post, 1 inch diameter, firmly set, projecting 8 inches above a scattered mound of stone, with brass cap marked as described in the official record of the 1911 survey.

Rebuild mound of stone, 3 ft. base, to bottom of brass cap.

Corner is located 3.8 lks. west of a gate post in a corner of fences, extending south and east, on gently rolling lands, in mixed grasses and native plants.

From the corner of sections 22, 23, 26, and 27.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

N. 0°00.5' W., between sections 22 and 23.

19.971 Point for the S 1/16 section corner of sections 22 and 23.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 20 inches in the ground, to bedrock, with aluminum cap marked

T27S R10W
S 1/16
S22 | S23
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Raised a mound of stone, 3 ft. base, to bottom of the aluminum cap.

Corner is located on gently rolling land, in mixed grasses and native plants.

39.942 The 1/4 section corner of sections 22 and 23, monumented with an iron post, 1 inch diameter, firmly set, projecting 9 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Raised a mound of stone, 2 ft. base by 9 inches high, around the iron post.

Corner is located in small rolling hills, in thick mixed grasses and native plants.

79.931 The corner of sections 14, 15, 22, and 23, monumented with an iron post, 2 inches diameter, firmly set, projecting 7 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fencepost alongside.

Corner is located on gently rolling land, in heavy mixed grasses and plants.

From the corner of sections 2, 3, 10, and 11, monumented with an iron post, 2 inches diameter, firmly set, projecting 1 inch above a column of concrete, 8 inches diameter, projecting 1 inch above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fencepost alongside.

Corner is located on nearly level ground, in thick cheat grass and greasewood.

N. 0°02.0' W., between sections 2 and 3.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

- 20.004** Point for the S 1/16 section corner of section 2 only, not monumented.
- 24.334** Point for the S 1/16 section corner of section 3 only, not monumented.
- 40.008** The 1/4 section corner of sections 2 only, monumented with an iron post, 1 inch diameter, firmly set, projecting 1 inch above a column of concrete, 8 inches diameter, projecting 3 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, referring to a common corner with section 2, with a steel fencepost alongside.

Corner is located on nearly level and open land, in heavy cheat grass and thinly spread brush.

Remove the marks pertaining to section 3, and add 2012 to the aluminum cap.

N. 0°00.9' E., beginning new measurement.

- 4.337** The 1/4 section corner of section 3 only at proportionate distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
1/4
S3 |
2012

- 44.372** The corner of sections 2, 3, 34, and 35 monumented with an iron post, 3 inches diameter, firmly set, projecting 2 inches above an 8 inch diameter column of concrete with brass cap marked as described in the 1911 resurvey.
-

The Reestablishment of the Survey Executed by J. Bausman in 1870
and the Resurvey Executed by J.W. Dougall in 1910.

From the corner of sections 3, 4, 33, and 34, on the south boundary of the township, hereinbefore described.

N. 0°04.5' E., between sections 33 and 34.

- 20.193** Point for the S 1/16 section corner of sections 33 and 34.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

T27S R10W
S 1/16
S33 | S34
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in sandy soil.

- 40.386** The 1/4 section corner of sections 33 and 34, monumented with an iron post, 1 inch diameter, firmly set in concrete, projecting 1 inch above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Corner is located on gently rolling land, in mixed grasses and native plants.

N. 0°04.7' E., beginning new measurement.

- 20.191** Point for the N 1/16 section corner of sections 34 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
| N 1/16
| S34
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in thick grasses.

- 39.276** The closing corner of sections 27 and 34 only, monumented with an iron post, 2 inches diameter, firmly set, projecting 11 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Raise a mound of stone, 1 ft. base and 10 inches high, west of the iron post.

Corner is located 1.1 lks. west of a corner of barbed-wire fences, extending north and east, on gently rolling land, in mixed grasses and native plants.

The Reestablishment of the Survey Executed by
J.W. Dougall in 1911.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

From the corner of sections 26, 27, 34, and 35.

S. 89°54.8' W., between sections 27 and 34.

21.642 Point for the E 1/16 section corner of section 34 only, not monumented.

39.892 The 1/4 section corner of section 27 only, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 4 inches above concrete, with brass cap marked, Beaver County Survey Monument T27S R10W 1/4 S27 S34 LS174457 2007.

This position is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located 3.7 lks. south of a barbed-wire fence line, in native plants.

41.588 Point for the 1/4 section corner of section 34 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W

1/4 S34

2012

Bury a magnet at the base of the aluminum post.

Raise a mound of stone 1.5 ft. base, 1 ft. high, south of the aluminum post.

Corner is located 2.6 lks. south of a fence line extending east and west, on gently rolling ground, in missed native pants and grasses.

81.480 The closing section corner of section 27 and 34 only.

The Reestablishment of the Survey Executed by J. Bausman in 1870
and the Resurvey Executed by J.W. Dougall in 1910.

From the closing section corner of sections 27 and 34 only.

N. 0°03.9' W., along the east boundary of section 33.

1.109 The corner of sections 28 and 33 only, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 5 inches above concrete, with aluminum cap marked, Beaver County Survey Monument T27S R10W S28

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

S33 S27 LS174457 2007.

This position is accepted as a careful and faithful
reestablishment of the original corner position.

Corner is located at a corner of barbed-wire fences, extending
south and west, on gently rolling land, in native grasses and
plants.

N. 0°00.2' E., between sections 27 and 28.

38.967 Point for the 1/4 section corner of section 27 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23
inches in the ground, with aluminum cap marked

T27S R10W
1/4
| S27
2012

Set a steel fence post alongside and buried a magnet at the base
of the aluminum post.

Corner is located on gently rolling land, in rows of thick bunch
grass.

N. 0°00.1' W., beginning new measurement.

1.366 The 1/4 section corner of section 28 only, monumented with an
iron post, 1 inch diameter, firmly set, projecting 13 inches
above the ground, with brass cap marked as described in the
official record of the 1911 resurvey, with a steel fence post
alongside.

Remove marks "27" and add "2012" to the brass cap.

Corner is located in noticeably disked, gently rolling land.

N. 0°00.6' W., beginning new measurement.

38.710 The closing corner of sections 22 and 27 only, monumented with
an iron post, 2 inches diameter, firmly set, projecting 7 inches
above the ground, with the brass cap marked

T27S R10W
S C | S22
S C | S27
1911

A steel fencepost is located alongside the iron post.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

Corner is located on gentle rolling lands, in mixed brush.

The Reestablishment of the Survey Executed by
J.W. Dougall in 1911.

From the corner of sections 22, 23, 26, and 27.

N. 89°58.9' W., between sections 22 and 27.

19.978 Point for the E 1/16 section corner of sections 22 and 27.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
S22
E 1/16 —————
S27
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling lands, in scattered mixed plants and grasses.

39.956 The 1/4 section corner of sections 22 and 27, monumented with an iron post, 1 inch diameter, firmly set, projecting 9 inches above the ground, with brass cap marked as described in the official record of the 1911 survey.

Set a steel fence post alongside the iron post.

Corner is located on gently rolling land, with a well beaten cattle trail 1.5 lks. to the south, in native plants and grasses.

N. 89°57.8' W., beginning new measurement.

41.483 The closing section corner of sections 22 and 27 only.

The Reestablishment of the Survey Executed by J. Bausman in 1870
and the Resurvey Executed by J.W. Dougall in 1910.

N. 0°50.7' W., along the east boundary of section 28.

1.641 The corner of sections 21 and 28 only, monumented with an iron post, 2 inches diameter, firmly set, projecting 3 1/2 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

alongside.

Found a 42 inch long cedar post, charred in some spots, lying on the ground 28 inches northeast of the iron post.

Wired the cedar post to the steel fence post.

Corner is located on gently rolling land, in mixed grasses, plants, and sagebrush.

N. 0°16.6' E., between sections 21 and 22.

38.260 Point for the 1/4 section corner of section 22 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
1/4
| S22
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in heavy scattering brush.

N. 0°16.6' E., beginning new measurement.

2.064 The 1/4 section corner of section 21 only, monumented with an iron post, 1 inch diameter, firmly set, flush in a column of concrete, 8 inches diameter, projecting 4 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post and decayed fragments of the iron post alongside.

Remove marks "S22" and add "2012" to the brass cap.
Corner is located on gently rolling land, in heavy brush.

N. 0°14.5' E., beginning new measurement.

37.837 The closing corner of sections 15 and 22 only, monumented with an iron post, 2 inches diameter, firmly set, projecting 10 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Corner is located on small rolling hills, in cheat grass and thinly spread brush.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

The Reestablishment of the Survey Executed by
J.W. Dougall in 1911.

From the corner of sections 14, 15, 22, and 23.

S. 89°57.0' W., between sections 15 and 22.

- 39.845 The 1/4 section corner of sections 15 and 22, monumented with an iron post, 1 inch diameter, firmly set, projecting 6 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fencepost alongside.

Corner is located on gently rolling, mostly flat land, in cheat grass, native plants, and thin sagebrush.

S. 89°55.3' W., beginning new measurement.

- 41.236 The closing section corner of sections 15 and 22 only.
-

The Reestablishment of the Survey Executed by J. Bausman in 1870
and the Resurvey Executed by J.W. Dougall in 1910.

N. 0°06.8' W., along the east boundary of section 21.

- 2.428 The corner of sections 16 and 21 only, monumented with an iron post, 2 inches diameter, loosely set, projecting 13 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Upon evaluation, it was found that the buried portion of the iron pipe was corroded to the concrete core; due to the poor condition of the iron post I replaced this monument.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S	R10W
S16	
<hr/>	
S21	
2012	

Deposit iron post alongside and buried a magnet at the base of the aluminum post.

Reset steel fence post alongside the aluminum post.

Corner is located on small rolling hills, in cheat grass and scattered brush.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

The Reestablishment of the Survey Executed by
J.W. Dougall in 1911.

From the corner of sections 2, 3, 10, and 11.

N. 89°59.6' W., between sections 3 and 10.

19.922 Point for the E 1/16 section corner of section 10 only, not monumented.

20.937 Point for the E 1/16 section corner of section 3 only, not monumented.

39.844 The 1/4 section corner of sections 3 and 10, monumented with an iron post, 1 inch diameter, firmly set, projecting 2 inch above a column of concrete, 8 inches diameter, set flush with the ground, with brass cap marked common as described in the official record of the 1911 resurvey, with steel fence post set 1 foot north of the iron post. I remove the marks referring to section 3 and add the date "2012" to the bottom of the cap. This 1/4 section corner functions now for section 10 only.

Corner is located on gently rolling land, in heavy cheat grass.

N. 89°57.8' W., beginning new measurement.

1.052 Point for the 1/4 section corner of section 3 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T26S R10W

S3

1/4 ———

2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in heavy cheat grass.

40.970 The closing corner of sections 3 and 10 only, monumented with an iron post, 2 inches diameter, firmly set, projecting 2 inches above a column of concrete, 8 inches diameter, projecting 1 inch above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Corner is located on nearly level wide open land, in thick cheat grass.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

The Reestablishment of the Survey Executed by J. Bausman in 1870
and the Resurvey Executed by J.W. Dougall in 1910.

N. 0°08.5' E., on the east boundary of section 9.

- 3.665 The corner of sections 4 and 9 only, monumented with an iron post, 2 inches diameter, firmly set, projecting 3 1/2 inches above a column of concrete, 8 inches diameter, flush with the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post, deeply set and leaning southeast, alongside.

Corner is located on nearly level, wide open land, in cheat grass.

N. 0°06.3' E., between sections 3 and 4.

- 20.113 Point for the S 1/16 section corner of section 3 only.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S	S 1/16	R10W
	S3	

2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in heavy cheat grass.

- 40.226 The 1/4 section corner of sections 3 and 4, monumented with an iron post, 1 inch diameter, firmly set, projecting 4 inches above a column of concrete, 8 inches diameter, projecting 2 inches above the ground, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post alongside.

Corner is located on nearly level land, in thick cheat grass and greasewood.

N. 0°01.7' E., beginning new measurement.

- 40.385 The corner of sections 3, 4, 33, and 34, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 2.5 inches above a column of concrete, 8 inches diameter, flush with the ground, with brass cap marked, Beaver County Survey Monument LS#174457 T26S R10W S33 S34 S4 S3 1997, with a steel fencepost alongside.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

This position is accepted as a careful and faithful perpetuation of the original corner position.

A stone, marked with 3 notches on the east and west edges, set with 4 inches projecting above the ground, is located on the north side of the galvanized steel pipe.

A mushroomed iron pipe, 25 inches long, 2 inches diameter, lying on the ground is located 3.7 lks. southeast of the galvanized steel pipe.

Corner is located on gently rolling land, in heavy brush and mixed grasses.

The Reestablishment of the Survey Executed by
J. Bausman in 1870.

From the corner of sections 4, 5, 32, and 33, on the south boundary of the township, hereinbefore described.

N. 0°31.1' E., between sections 32 and 33.

40.349

Point for the 1/4 section corner of sections 32 and 33, at proportionate distance; there is no remaining evidence of the original corner. The corner point falls in a cultivated field.

From this corner point, a point selected for an offline witness corner bears N. 79°01.3' E., 4.404 chains distance.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
W C
1/4
↙ S32 | S33
2012

Set a steel fence post alongside and in a barbed wire fence line, extending east and west, and buried a magnet at the base of the aluminum post.

Corner is located 0.8 lks. south of a fence line, extending east and west, on nearly flat ground, with a cultivated field to the south, and flat uncultivated land to the north.

80.698

The corner of sections 28, 29, 32, and 33, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set in concrete, projecting 5 inches above the ground, with brass cap marked, Beaver County Survey Monument LS#174457 T27S R10W S29 S28 S32 S33 1996, with a steel fencepost alongside.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

This position is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located on the east edge of a 2 1/2 ft. tall bank, 136.4 lks. west of the westerly rail of railroad tracks, and 40 ft. west of the center of a two-track dirt road, with both the railroad tracks and two-track dirt road extending northeasterly and southwesterly through the area, in sagebrush and sunflowers.

From the corner of sections 28, and 33 only.

S. 89°53.3' W., between sections 28 and 33.

- 39.713 The 1/4 section corner of sections 28 and 33, monumented with an unrecorded General Land Office iron post, 1 inch diameter, firmly set, projecting 10 inches above the ground, with brass cap marked

T1 S28 1/4
1916 S33

A steel fence post is located alongside the iron post.

Corner is located 2.3 lks. south of a fence line, extending east and west, in cheat grass.

S. 89°58.5' W., beginning new measurement.

- 20.315 Point for the W 1/16 section corner of sections 28 and 33.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
S28
W 1/16 —————
S 33
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

A rebar of unknown origin, 1/2 inch diameter, firmly set, projecting 1 inch above the ground, bears S. 74°05'45" W., 0.5 lks. distance.

Corner is located 1.4 lks. north of an intersection of fences, extending east, west, and south, on gently rolling land, near the north end of Yellow Banks, in scattered sagebrush and cheat grass.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

40.630 The corner of sections 28, 29, 32, and 33.

N. 0°28.0' W., between sections 28 and 29.

20.174 Point for the S 1/16 section corner of sections 28 and 29.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
S 1/16
S29 | S28

2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling lands, in thick scattered brush.

40.348 The 1/4 section corner of sections 28 and 29, monumented with a Westwood Professional Services survey monument, a rebar, 3/4 inch diameter, firmly set, 1 inch below grade. The aluminum cap, 2 1/2 inches diameter and marked, WESTWOOD PROFESSIONAL SERVICES 2011 1/4 S29 S28 LS6763499; was found partially buried 1.1 lks. northeast of the rebar. It was apparent the cap had been removed when the field the corner falls in was disked.

This position of the rebar is accepted as a careful and faithful reestablishment of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
1/4
S29 | S28

2012

Deposit Westwood aluminum cap, set a steel fence post alongside, and buried a magnet along with the rebar at the base of the aluminum post.

Corner is located on flat, cultivated land, with recently plowed rows running east and west through it.

From the corner of sections 21 and 28 only.

S. 89°56.3' W., between sections 21 and 28.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

- 40.478** Point for the 1/4 section corner of sections 21 and 28, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
S21
1/4 ———
S28
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in scattered brush.

- 60.717** Point for the W 1/16 section corner of sections 21 and 28.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
S21
W 1/16 ———
S28
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on flat, cultivated land, in grass and thin brush.

- 80.956** The corner of sections 20, 21, 28, and 29, monumented with a Westwood Professional Services survey monument, a rebar, 3/4 inch diameter, firmly set, with an aluminum cap, 2 1/2 inches diameter attached, set flush with the ground and marked, WESTWOOD PROFESSIONAL SERVICES 2011 T27S R10W S20 S21 S29 S28 LS6763499.

This position is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located on a flat, wide open, dry, flood area, in thick foxtail and grasses.

N. 0°25.8' E., between sections 20 and 21.

- 40.348** Point for the 1/4 section corner of sections 20 and 21, at proportionate distance; there is no remaining evidence of the original corner.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

Found a rebar, 3/4 inch diameter, and a red plastic insert, similar to those found inside the Westwood Professional Services aluminum caps, in the area, clearly disturbed when the field was plowed. Could not locate the Westwood aluminum cap. The land owner stated the field will not be farmed in the foreseeable future and permission was given to set a monument in the field.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
1/4
S20 | S21
2012

Deposit the rebar and red plastic insert, set a steel fence post alongside, and buried a magnet at the base of the aluminum post.

Corner is located on plowed farm land, in scattered green plants and grasses.

60.522 Point for the N 1/16 section corner of sections 20 and 21.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
N 1/16
S20 | S21
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located near the meeting of level cultivated farm land and gently rolling, brush covered land.

80.696 The corner of sections 16, 17, 20, and 21, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with brass cap marked, Beaver County Survey Monument LS#174457 T27S R10W S17 S16 S20 S21 1999, with a steel fencepost alongside.

This position is accepted as a careful and faithful perpetuation of the original corner position.

An iron pipe, 41 inches long, 2 inches diameter and mushroomed on one end, is located alongside, lying on the ground.

Corner is located in a barbed-wire fence line, extending east and west, 0.3 lks. east of the middle post of a 12 ft. long H-brace in the fence line, on gently rolling land, in mixed brush and cheat grass.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

From the corner of sections 16 and 21 only.

N. 89°59.2' W., between sections 16 and 21.

- 40.342** The 1/4 section corner of sections 16 and 21, monumented with a Westwood Professional Services survey monument, a rebar, 3/4 inch diameter, firmly set, with an aluminum cap, 2 1/2 inches diameter, set flush with the ground and marked, WESTWOOD PROFESSIONAL SERVICES 2011 1/4 S16 S21 LS6763499.

This position is accepted as a careful and faithful reestablishment of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
S16
1/4 ———
S21
2012

Deposit inverted Westwood aluminum cap and rebar and a magnet at the base of the aluminum post. Set a steel fence post alongside.

Corner is located on generally flat ground, in cheat grass and scattered sagebrush.

- 60.513** Point for the W 1/16 section corner of sections 16 and 21, not monumented.

- 80.684** The corner of sections 16, 17, 20, and 21.
-

From the corner of sections 8, 9, 16, and 17, monumented with a Beaver County survey monument, an aluminum cap, 2 1/2 inches diameter, firmly set, flush with crumbling remains of pavement of the old state highway and marked, Beaver County Survey Monument LS174457 T27S R10W S8 S9 S17 S16 2000.

This position is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located slightly west of centerline of the old state highway, extending northerly and southerly, in scattered brush and cheat grass.

N. 0°00.4' E., between sections 8 and 9.

- 40.561** The 1/4 section corner of sections 8 and 9, monumented with a Westwood Professional Services survey monument, an aluminum cap,

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

2 1/2 inches diameter, firmly set, flush in the pavement of State Highway 257 and marked, WESTWOOD PROFESSIONAL SERVICES 2011 1/4 S8 S9 LS6763499.

This position is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located 12.2 lks. east of highway center striping, near the north end of a curve in the highway that concaves west, after which the highway extends northerly.

North, beginning new measurement.

- 40.532** Point for the corner of sections 4, 5, 8, and 9, at proportionate distance; there is no remaining evidence of the original corner.

Set a railroad spike flush with paved surface of a road, marked X 2012.

from which

An aluminum post, 30 inches long, 2 1/2 inches diameter, set 23 inches in the ground, over magnet, for a reference monument, bears S. 73°28.1' E., 72 links distance, with aluminum cap marked, RM T27S R10W S9 47.4 FT TO COR 2012 and an arrow pointing to the true corner point, with a steel fence post 2.0 lks. east of aluminum post.

A Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 1/2 inch above the ground, for a reference monument, bears N. 89°21.5' W., 1.515 chains distance, with brass cap marked, Beaver County Survey Monument LS#174457 T27S R10W S5 S4 S8 S9 WC 2009, and an arrow pointing to the true corner point.

Corner is located in Hwy 257.

N. 0°16.5' W., between sections 4 and 5.

- 40.546** Point for the 1/4 section corner of sections 4 and 5, at proportionate distance; there is no remaining evidence of the original corner.

Set a railroad spike, flush with paved surface of a road, marked X 2012.

from which

An aluminum post, 30 inches long, 2 1/2 inches diameter, set 23 inches in the ground, over magnet, for a reference monument, bears N. 86°22.8' E., 81 links distance, with

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

aluminum cap marked, RM S4 53.2 FT TO COR 2012 and an arrow pointing to the true corner point, with a steel fence post 2.0 lks. east of aluminum post.

An aluminum post, 30 inches long, 2 1/2 inches diameter, set 23 inches in the ground, over magnet and plastic bottle, for a reference monument, bears N. 89°20.4' W., 76 links distance, with aluminum cap marked, RM T27S R10W S5 50.0 FT TO COR 2012 and an arrow pointing to the true corner point, with a steel fence post 2.0 lks. east of aluminum post.

Corner is located in Hwy 257.

- 81.092** The corner of sections 4, 5, 32, and 33, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, 8 inches below grade, with aluminum cap marked as described in the official record of the 2011 resurvey, with a steel fence post alongside. from which

An aluminum post, 2 1/2 inches diameter, firmly set, projecting 1 1/2 inches above the ground, for a reference monument, bears N.43°58.6'E., 160.2 lks. distance (Note that the resurvey by M.J. Kurchinski in 2011 shows incorrectly the distance to the RM as being 106.6 lks.), with aluminum cap marked, RM T26S R10W S33 105.73 FT. 2011 and an arrow pointing to the true corner point, with a steel fence post 2.0 lks. east of aluminum post.

A Beaver County witness corner, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 1 inch above the ground, bears S.89°59.5'W., 121.2 links distance, with aluminum cap marked, BEAVER COUNTY SURVEY MONUMENT T26S R10W S32 S33 S5 S4 T27S LS 174457 2009 WC and an arrow pointing to the true corner point, with a steel fence post 1.2 lks. south.

Corner is located 2.4 lks. west of the west edge of chipped and oiled State Highway 257.

From the corner of sections 5, 6, 31, and 32, on the south boundary of the township, hereinbefore described.

N. 0°05.1' E., between sections 31 and 32.

- 40.340** Point for the 1/4 section corner of sections 31 and 32, at proportionate distance; there is no remaining evidence of the original corner.

Set a railroad spike, 7 inches long, with top of the spike 2 inches below the pavement of State Highway 257.

from which

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

An aluminum post, 30 inches long, 2 1/2 inches diameter, set 22 inches in the ground, above a magnet, for a reference monument, bears S. 43°02.4' E., 86.7 links distance, with aluminum cap marked, RM 1/4 S32 57.2 FT. 2012 and an arrow pointing to the true corner point.

Set a steel fence post alongside of the aluminum post.

An aluminum post, 30 inches long, 2 1/2 inches diameter, set 22 inches in the ground, above a magnet, for a reference monument, bears S. 77°27.7' W., 56.9 links distance, with aluminum cap marked, RM 1/4 S31 37.6 FT. 2012 and an arrow pointing to the true corner point.

Set a steel fence post alongside of the aluminum post.

Corner is in the yellow center line striping of State Highway 257.

80.680 The corner of sections 29, 30, 31, and 32, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, 2 inches below grade, with aluminum cap marked, Beaver County Survey Monument T27S R10W S30 S29 S31 S32 PLS174457 2011.

This position is accepted as a careful and faithful reestablishment of the original corner position.

Set a steel fence post alongside the galvanized steel pipe.

Corner is located 13.7 lks. west of the west edge of State Highway 257.

From the 1/4 section corner of section 29 and 32, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 5 inches above the ground, with brass cap marked, Beaver County Survey Monument LS#174457 T27S R10W 1/4 S29 S32 1996, with a steel fence post alongside.

This position is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located in a barbed-wire fence line, extending north and south, on a gentle north slope, on rolling hills, in cheat grass and mixed brush.

The corner of sections 30 and 31 only, on the west boundary of the township, hereinbefore described.

S. 89°51.6' W., between sections 29 and 32.

40.338 The corner of sections 29, 30, 31, and 32.

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

N. 89°53.5' W., between sections 30 and 31.

- 40.222** Point for the 1/4 section corner of sections 30 and 31, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
S30
1/4 —————
S31
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 7.3 lks. north of a chain link fence line for the Milford Airport and 5.3 lks. south of a two-track dirt road, extending east and west, in heavy sagebrush.

- 80.314** The corner of sections of 19 and 30 only, on the west boundary of the township, hereinbefore described.
-

From the corner of 29, 30, 31, and 32.

N. 0°03.9' E., between sections 29 and 30.

- 40.340** Point for the 1/4 section corner of sections 29 and 30, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
1/4
S30 | S29
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 68.2 lks. east of the chain-link fence line of the Milford Airport, and 45.5 lks. west of the west edge of State Highway 257.

- 80.680** Point for the corner of sections 19, 20, 29, 30, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

inches in the ground, with aluminum cap marked

T27S	R10W
S19	S20
S30	S29
2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 53.1 lks. west of the yellow center line striping of State Highway 257.

From the 1/4 section corner of sections 20 and 29, monumented with an iron pipe of unknown origin, 1 1/2 inches diameter, with a coupling on one end, 2 inches in diameter, firmly set, projecting 4 inches above the ground, with an embedded mound of stone, 1.5 ft. base to the east.

Remains of an old fence line extend east from the iron pipe.

This position is accepted as a careful and faithful perpetuation of the original corner position.

At the corner point

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, in a small mound of stone, with aluminum cap marked

T27S	R10W
S20	
1/4	—————
S29	
2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 0.9 lks. east of a barbed-wire fence line, extending north and south, on a hilltop, nearly flat, with rolling hills in the area.

S. 89°52.0' W., between sections 20 and 29.

40.060 The corner of sections 19, 20, 29, and 30.

N. 89°59.3' W., between sections 19 and 30.

20.070 Point for the E 1/16 section corner of sections 19 and 30, not monumented.

40.140 Point for the 1/4 section corner of sections 19 and 30, at

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
S19
1/4 ———
S30
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in thick sagebrush.

- 80.209** The corner of sections of 19 and 30 only, on the west boundary of the township, hereinbefore described.
-

From the corner of sections 19, 20, 29, and 30.

N. 0°05.8' W., between sections 19 and 20.

- 20.170** Point for the S 1/16 section corner of sections 19 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

S 1/16
T27S S19 | S20 R10W
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Deposit 4 elk legs alongside the aluminum post as a memorial.

Corner is located 8.3 lks. east of MCI WORLDCOM buried fiber optic line, on rolling lands, in scattered mixed brush.

- 40.340** Point for the 1/4 section corner of sections 19 and 20, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 22 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

1/4
T27S S19 | S20 R10W
2012

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located near the south end of an old gravel pit, on rolling hills, in thick mixed brush.

60.510 Point for the N 1/16 section corner of sections 19 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S	N 1/16	R10W
	S19 S20	
	2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located near the north end of an old gravel pit, at the base of a slight northeast slope, on gently rolling land, in thick mixed brush.

80.680 The corner of sections 17, 18, 19, and 20, monumented with a Beaver County survey monument, an iron pipe 2 inches diameter, firmly set projecting 1 inch above the ground, with brass cap marked as described in the official record of the 2012 resurvey.

From the corner of sections 16, 17, 20, and 21.

S. 89°57.7' W., between sections 17 and 20.

40.570 Point for the 1/4 section corner of sections 17 and 20, at proportionate distance; there is no remaining evidence of the original corner.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S	R10W
S17	
1/4	_____
	S20
	2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located in fence line, extending east and west, on gently rolling land, in scattered brush.

60.855 Point for the W 1/16 section corner of sections 17 and 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

inches in the ground, with aluminum cap marked

S17
W 1/16
S20
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located in a barbed-wire fence line, extending east and west, 30.4 lks. east of a corner of fences, extending south and east, in the dry Beaver River bottom.

81.140 The corner of sections 17, 18, 19, and 20.

From the corner of sections 8, 9, 16, and 17.

N. 89°29.6' W., between sections 8 and 17.

40.313 The 1/4 section corner of sections 8 and 17, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 4 inches above the ground, with aluminum cap marked, Beaver County Survey Monument LS#174457 T27S R10W 1/4 S8 S17 2000, with a steel fence post alongside.

Two pieces of corroded iron pipe, 29.5 inches long, 2 inches diameter, mushroomed at one end, and 10 inches long, 2 inches diameter, are located 3.0 lks. north of the galvanized steel post.

This position is accepted as a careful and faithful perpetuation of the original corner position.

Corner is located on gently rolling land, in scattered grasses and brush.

N. 89°34.9' W., beginning new measurement.

40.409 The corner of sections 7, 8, 17, and 18, monumented with a Beaver County survey monument, a rebar, 5/8 inch diameter, firmly set, projecting 1 inch above the ground, with aluminum cap marked as described in the official record of the 2012 resurvey.

From the corner of sections 4, 5, 8, and 9.

N. 89°21.5' W., between sections 5 and 8.

40.327 The 1/4 section corner of sections 5 and 8, monumented with a

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with aluminum cap marked, Beaver County Survey Monument T27S R10W 1/4 S5 S8 LS174457 2009, with a steel fence post 8 inches north.

A piece of corroded iron pipe, mushroomed at one end, 3.5 ft. long, 2 inches diameter, is wired to the steel fence post.

This position is accepted as a careful and faithful perpetuation of the original corner position.

Corner is located on gently rolling land, in sandy soil and small scattered brush.

S. 89°57.2' W., beginning new measurement.

20.166 Point for the W 1/16 section corner of sections 5 and 8, not monumented.

40.332 The corner of sections 5, 6, 7, and 8, monumented with a Beaver County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 1 inch above the ground, with aluminum cap marked as described in the official record of the 2012 resurvey.

N. 0°58.3' W., between sections 5 and 6.

20.263 Point for the S 1/16 section corner of sections 5 and 6.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

		S 1/16	
T27S	S6	S5	R10W
		2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Deposit a glass bottle at the base of the aluminum post as a memorial.

Corner is located 93.6 lks. south of the southerly rail of railway, extending easterly and westerly through the area, on rolling land, in thick scattered brush.

40.526 The 1/4 section corner of section 5 and 6, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with aluminum cap marked, Beaver County Survey Monument

DEPENDENT RESURVEY OF A PORTION OF THE SUBDIVISIONAL LINES,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

1/4 T27S R10W S6 S5 LS174457 2009.

An axel rod, 23 inches long, 1 inch square, was found lying on the ground 5.1 lks. northeast of the galvanized steel pipe.

Set a steel fence post 1.5 lks. north and placed the axel rod alongside the galvanized steel pipe.

This position is accepted as a careful and faithful perpetuation of the original corner position.

Corner is located at a corner of hoary fence posts remaining from old fence lines, extending north and west, on a dry flood plain of the Beaver River, in thick brush.

N. 0°05.7' W., beginning new measurement.

20.088 Point for the N 1/16 section corner of sections 5 and 6, not monumented.

40.136 The corner of sections 5, 6, 31, and 32, on the north boundary of the township, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 3 inches above the ground, with aluminum cap marked as described in the official record of the 2011 resurvey.

Corner is located on a generally flat river bottom, at an apparent corner of old fences, extending south and west, with hoary fence post stumps, and hoary fence posts lying on the ground, dispersed to form said fence corner.

Subdivision of Section 3
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the south 1/4 section corner of the section 3 only.

N. 0°19.9' E., on the N-S centerline of section 3.

24.127 Point for the center S 1/16 section corner of section 3.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
C
S 1/16 | S3
C
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

SUBDIVISION OF SECTION 3,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner is located on gently rolling land, in thick cheat grass.

- 44.131** Point for the center 1/4 section corner of section 3, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 3
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on nearly flat ground, in cheat grass and native plants.

- 84.403** The 1/4 section corner of sections 3 and 34, on the north boundary of the township, monumented with an iron post, 1 inch diameter, firmly set in concrete column 8 inches in diameter, projecting 4 inches above the ground and the iron post projecting 1 inch above the concrete, with brass cap marked as described in the official record of the 1911 resurvey, with a steel fence post set alongside.

Corner is located in nearly level ground, in thick dry grass and sparsely mixed green plants.

From the 1/4 section corner of section 3 only.

S. 89°41.9' W., on the E-W centerline of section 3.

- 20.505** Point for the center E 1/16 section corner of section 3.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S E 1/16
C ————— C R10W
S 3
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in thick grasses and native plants.

- 40.545** The center 1/4 section corner of section 3.

- 80.705** The 1/4 section corner of sections 3 and 4.
-

SUBDIVISION OF SECTION 3,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

From the center E 1/16 section corner of section 3.

N. 0°31.7' E., on the N-S centerline of the NE 1/4 of section 3.

- 40.156** Point for the E 1/16 section corner of sections 3 and 34, on the north boundary of the township.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T26S R10W
E 1/16 S 34
 S 3
T27S
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on nearly flat land in heavy cheat grass, with some scattered brush.

From the point for the E 1/16 section corner of section 3 only.

N. 0°28.9' E., on the N-S centerline of the SE 1/4 of section 3.

- 24.235** Point for the SE 1/16 section corner of section 3 at the intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S SE 1/16 R10W
 S 3
 2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in cheat grass and native plants.

- 44.239** The center E 1/16 section corner of section 3.

From the point for the S 1/16 section corner of section 3 only.

N. 89°42.0' W., on the E-W centerline of the SE 1/4 of section 3.

- 20.679** The SE 1/16 section corner of section 3.

- 40.668** The center S 1/16 section corner of section 3.

SUBDIVISION OF SECTION 3,
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

From the center S 1/16 section corner of section 3.

S. 89°32.3' W., on the E-W centerline of the SW 1/4 of section 3.

40.084 The S 1/16 section corner of sections 3 and 4.

Subdivision of Section 5
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 5 and 8.

N. 0°24.6' W., on the N-S centerline of section 5.

20.145 Point for the center S 1/16 section corner of section 5, not monumented.

40.290 Point for the center 1/4 section corner of section 5, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S	C 1/4	R10W
	S 5	
	2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 145.8 lks. north of the northerly track of a railway that extends easterly and westerly through the area, on generally flat ground, in scattered brush and grass.

60.472 Point for the center N 1/16 section corner of section 5.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S	N 1/16	C	S 5	R10W
		C		
		2012		

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in scattered brush and grasses.

80.634 The 1/4 section corner of sections 5 and 32, on the north

SUBDIVISION OF SECTION 5

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

boundary of the township, monumented with a Beaver County galvanized steel pipe, 2 inches in diameter, firmly set in concrete projecting 3 inches above the ground, with aluminum cap marked as described in the 2011 resurvey, with a steel fence post 1.5 lks. SE of the galvanized pipe.

Corner is located in gently rolling land, with scattered brush and sandy soil.

From the 1/4 section corner of sections 4 and 5.

N. 89°43.3' W., on the E-W centerline of section 5.

40.414 The center 1/4 section corner of section 5.

60.778 Point for the center W 1/16 section corner of section 5.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S	W 1/16	R10W
	C ——— C	
	S 5	
	2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located in west track of a two-track dirt road, extending north and south, and 18.5 lks. east of an old fence line, consisting of hoary posts, extending north and south, on gently rolling land, in thick scattered brush and grasses.

81.142 The 1/4 section corner of sections 5 and 6.

From the point for the W 1/16 section corner of sections 5 and 8.

N. 0°41.5' W., on the N-S centerline of the SW 1/4 of section 5.

20.204 Point for the SW 1/16 section corner of section 5, at the intersection with the E-W center line of the SW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S	SW 1/16	R10W
	S 5	
	2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

SUBDIVISION OF SECTION 5

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Deposit a plastic, pint sized, milk bottle beneath the aluminum post as a memorial.

Corner is located 13.6 lks. west of the west track of a two-track dirt road, extending north and south, on gently rolling land, in scattered mixed brush and grasses.

- 40.408** The center west 1/16 section corner of section 5.
-

From the point for the center S 1/16 section corner of section 5.

N. 89°53.0' W., on the E-W centerline of the SW 1/4 of section 5.

- 20.265** The SW 1/16 section corner of section 5.

- 40.530** The S 1/16 section corner of sections 5 and 6.
-

From the center W 1/16 section corner of section 5.

N. 0°15.1' W., on the N-S centerline of the NW 1/4 of section 5.

- 20.135** Point for the NW 1/16 section corner of section 5, at the intersection with the E-W center line of the NW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S	NW 1/16	R10W
	S 5	
	2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 7.0 lks. south of old remains of a fence line, extending east and west, and S. 86° W., 55.0 lks. distance from an intersection of the said old fence line, with a fence line of good condition that extends south; on generally flat land, in scattered brush and grasses.

- 40.239** The W 1/16 section corner of sections 5 and 32, on the north boundary of the township, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 5 inches above the ground, with aluminum cap marked as described in the official record of the 2011 resurvey, with a steel fence post 1.5 lks. north.

Corner located in the old remains of a fence line, extending east and west, on generally flat river bottom lands, in grass and scattered brush.

SUBDIVISION OF SECTION 5
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

From the center N 1/16 section corner of section 5.

N. 89°51.2' W., on the E-W centerline of the NW 1/4 of section 5.

20.307 The NW 1/16 section corner of section 5.

40.615 The point for the N 1/16 section corner of sections 5 and 6.

Subdivision of Section 6
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 6 and 7, monumented with a Beaver County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set in concrete, projecting 1 inch above ground, with aluminum cap marked as described in the official record of the 2012 resurvey, with a steel fence post 1 ft. north of the aluminum pipe.

N. 0°18.3' W., on the N-S centerline of section 6.

20.244 Point for the center S 1/16 section corner of section 6.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

$$\begin{array}{ccccc} & & C & & \\ T27S & & S\ 1/16 & | & S6 & R10W \\ & & C & & \\ & & 2012 & & \end{array}$$

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on a slight southwest slope, near the base of a small hill, in thick scattered brush.

From this corner point, an iron pipe of unknown origin, with a mushroomed top, 2 inches in diameter, firmly set, projecting 12 inches above the ground, bears S. 25°42'09" W., 11 links distance from the aluminum post.

40.488 Point for the center 1/4 section corner of section 6, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

$$\begin{array}{cc} T27S & R10W \\ C\ 1/4 & \\ S\ 6 & \\ 2012 & \end{array}$$

SUBDIVISION OF SECTION 6

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

A corroded iron post, 24.5 inches long, 2 inches diameter, with one end mushroomed, lying on the ground, is located S. 32° E., 18.8 lks. distance from the aluminum post.

Corner is located 56.9 lks. north of the center of a two-track dirt road, on generally flat ground, in heavy brush.

- 80.626** The 1/4 section corner of sections 6 and 31, on the north boundary of the township, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 2 inches above the ground, with aluminum cap marked, as described in the official record of the 2011 resurvey.

Corner is located on nearly flat ground, in cheat grass and scattered brush.

From the 1/4 section corner of sections 5 and 6.

S. 89°55.3' W., on the E-W centerline of section 6.

- 39.835** The center 1/4 section corner of section 6.

- 80.287** The 1/4 section corner of section 6 only, on the west boundary of the township, monumented with a Beaver County survey monument, an aluminum pipe, 2 1/2 inches diameter, firmly set, projecting 1 inch above ground, with aluminum cap marked as described in the official record of the 2012 resurvey.
-

From the center S 1/16 section corner of section 6.

S. 89°56.6' W., on the E-W centerline of the SW 1/4 of section 6.

- 40.522** The S 1/16 section corner of section 6 only, on the west boundary of the township, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 6 inches above the ground, with aluminum cap marked as described in the official record of dependent 2012 resurvey, with a steel fence post alongside.
-

Subdivision of Section 17

Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 17 and 20.

N. 0°30.3' E., on the N-S centerline of section 17.

SUBDIVISION OF SECTION 17

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

- 39.902** Point for the center 1/4 section corner of section 17, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 17
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in sandy soil and scattered brush.

- 59.985** Point for the center N 1/16 section corner of section 17.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S N 1/16 C S17 R10W
C
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in scattered brush and grasses.

- 80.068** The 1/4 section corner of sections 8 and 17.

From the 1/4 section corner of sections 16 and 17, monumented with a Beaver County survey monument, a galvanized steel pipe, 2 1/2 inches diameter, firmly set, projecting 5 1/2 inches above the ground, with aluminum cap marked, Beaver County Survey Monument LS#174457 T27S R10W S17 S16 2000, with a steel fence post alongside.

This corner set by Beaver County is accepted as a careful and faithful reestablishment of the original corner position.

Corner is located 22.7 lks. east of the easterly track of a two-track dirt road, extending northerly and southerly, on gently rolling land, in mixed brush.

N. 89°57.3' W., on the E-W centerline of section 17.

- 40.731** The center 1/4 section corner of section 17.

SUBDIVISION OF SECTION 17

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

- 81.144** The 1/4 section corner of sections 17 and 18, monumented with a Beaver County survey monument, an iron pipe, 2 inches diameter, firmly set, projecting 2 inches above the ground, with brass cap marked as described in the official record of the 2012 resurvey.
-

From the center N 1/16 section corner of section 17.

N. 89°46.1' W., on the E-W centerline of the NW 1/4 of section 17.

- 40.411** The N 1/16 section corner of sections 17 and 18, monumented with an aluminum post, 2 1/2 inches diameter, firmly set, projecting 8 inches above ground, with aluminum cap marked as described in the official record of the 2012 resurvey, with a steel fence post alongside.
-

Subdivision of Section 19

Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 19 and 30.

N. 0°02.6' W., on the N-S centerline of section 19.

- 20.162** Point for the center S 1/16 section corner of section 19, not monumented.

- 40.324** Point for the center 1/4 section corner of section 19, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 19
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 8 ft. north of the north edge of a two-track dirt road, on gently rolling land, in thick scattered brush.

- 60.508** Point for the center N 1/16 section corner of section 19, not monumented.

- 80.692** The 1/4 section corner of sections 18 and 19, monumented with a Beaver County survey monument, a rebar, 5/8 inches diameter, firmly set, projecting 3 inches above ground, with an aluminum cap, 2 inches diameter marked as described in the official record of the 2012 resurvey, with a steel fence post alongside.
-

SUBDIVISION OF SECTION 19

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

From the 1/4 section corner of sections 19 and 20.

S. 89°59.4' W., on the E-W centerline of section 19.

20.049 Point for the center E 1/16 section corner of section 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S	E 1/16	R10W
	C ————— C	
	S 19	
	2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in thick brush.

40.098 The center 1/4 section corner of section 19.

80.091 The 1/4 section corner of section 19 only, on the west boundary of the township, hereinbefore described.

From the center E 1/16 section corner of section 19.

N. 0°04.3' W., on the N-S centerline of the NE 1/4 of section 19.

20.177 Point for the NE 1/16 section corner of section 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S	NE 1/16	R10W
	S 19	
	2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on mostly flat ground, in heavy scattered brush.

40.354 Point for the E 1/16 section corner of sections 18 and 19, not monumented.

From the N 1/16 section corner of sections 19 and 20.

N. 89°59.5' W., on the E-W centerline of the NE 1/4 of section 19.

20.039 The NE 1/16 section corner of section 19.

SUBDIVISION OF SECTION 19
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

40.078 Point for the center N 1/16 section corner of section 19.

From the point for the E 1/16 section corner of sections 19 and 30.

N. 0°04.2' W., on the N-S centerline of the SE 1/4 of section 19.

20.166 Point for the SE 1/16 section corner of section 19.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S	SE 1/16	R10W
	S 19	
	2012	

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling ground, in thick sagebrush.

40.332 The center E 1/16 section corner of section 19.

From the S 1/16 section corner of sections 19 and 20.

N. 89°59.9' W., on the E-W centerline of the SE 1/4 of section 19.

20.059 The SE 1/16 section corner of section 19.

40.118 Point for the center S 1/16 section corner of section 19.

Subdivision of Section 20
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 20 and 29.

N. 0°16.2' E., on the N-S centerline of section 20.

40.271 Point for the center 1/4 section corner of section 20 at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S	R10W
C 1/4	
S 20	
2012	

SUBDIVISION OF SECTION 20

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located approximately 31.8 lks. east of a barbed-wire fence line, extending north and south, on gently rolling ground, in the dry bottoms of the Beaver River, in thick grasses.

- 60.443** Point for the center N 1/16 section corner of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

```

      T27S      C      R10W
      N 1/16 | S20
              C
            2012
  
```

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in scattered brush and grasses.

- 80.615** The 1/4 section corner of sections 17 and 20.
-

From the 1/4 section corner of sections 20 and 21.

S. 89°57.9' W., on the E-W centerline of section 20.

- 40.462** The center 1/4 section corner of section 20.

- 60.619** Point for the center W 1/16 section corner of section 20.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

```

      T27S      W 1/16      R10W
      C ————— C
              S 20
            2012
  
```

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located S. 39° E., 40.9 lks. distance from a corner of barbed-wire fences, extending north and east, and 29.5 lks. south of a barbed-wire fence line, extending east and west, on gently rolling land, in thick sagebrush.

- 80.776** The 1/4 section corner of sections 19 and 20.
-

SUBDIVISION OF SECTION 20

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

From the point for the N 1/16 section corner of sections 20 and 21.

S. 89°57.8' W., on the E-W centerline of the NW 1/4 of section 20.

40.516 The center N 1/16 section corner of section 20.

From the center W 1/16 section corner of section 20.

N. 0°05.2' E., on the N-S centerline of the NW 1/4 of section 20.

40.342 The W 1/16 section corner of sections 17 and 20.

Subdivision of Section 21

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

From the 1/4 section corner of sections 21 and 28.

N. 0°20.3' E., on the N-S centerline of section 21.

40.336 Point for the center 1/4 section corner of section 21 at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 21
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in mixed scattering brush.

60.489 Point for the center N 1/16 section corner of section 21, not monumented.

80.642 The 1/4 section corner of sections 16 and 21.

From the 1/4 section corner of section 21 only.

S. 89°57.3' W., on the E-W centerline of section 21.

40.429 The center 1/4 section corner of section 21.

60.634 Point for the center W 1/16 section corner of section 21.

SUBDIVISION OF SECTION 21

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
W 1/16
C ——— C
S 21
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on generally flat ground, in scattered brush.

80.839 The 1/4 section corner of sections 20 and 21.

From the W 1/16 section corner of sections 21 and 28.

N. 0°23.0' E., on the N-S centerline of the SW 1/4 of section 21.

40.342 The center W 1/16 section corner of section 21.

From the center W 1/16 section corner of section 21.

N. 0°23.1' E., on the N-S centerline of the NW 1/4 of section 21.

20.164 Point for the NW 1/16 section corner of section 21 at the intersection with the E-W center line of the NW 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
NW 1/16
S 21
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on the gentle southeast slope of a small hill, and 148.5 lks. north of an old fence line, extending northwesterly and southeasterly, in scattering brush and mixed grasses.

40.328 Point for the W 1/16 section corner of sections 16 and 21.

From the point for the center N 1/16 section corner of section 21.

SUBDIVISION OF SECTION 21
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

S. 89°59.0' W., on the E-W centerline of the NW 1/4 of section 21.

20.188 The NW 1/16 section corner of section 21.

40.376 The N 1/16 section corner of sections 20 and 21.

Subdivision of Section 22
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 22 and 27.

N. 0°03.9' E., on the N-S centerline of section 22.

19.964 Point for the center S 1/16 section corner of section 22, not monumented.

39.928 Point for the center 1/4 section corner of section 22, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 25 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 22
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in sandy soil.

79.883 The 1/4 section corner of sections 15 and 22.

From the 1/4 section corner of sections 22 and 27.

S. 89°59.9' W., on the E-W centerline of section 22.

19.950 Point for the center E 1/16 section corner of section 22, not monumented.

39.900 The center 1/4 section corner of section 22.

81.264 The 1/4 section corner of section 22 only.

From the E 1/16 section corner of sections 22 and 27.

N. 0°01.7' E., on the N-S centerline of the SE 1/4 of section 22.

SUBDIVISION OF SECTION 22

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

- 19.968** Point for the SE 1/16 section corner of section 22, at the intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
SE 1/16
S 22
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in scattered mixed grasses and plants.

- 39.936** The point for the center E 1/16 section corner of section 22.
-

From the S 1/16 section corner of sections 22 and 23.

N. 89°59.5' W., on the E-W centerline of the SE 1/4 of section 22.

- 19.964** The SE 1/16 section corner of section 22.

- 39.928** The point for the center S 1/16 section corner of section 22.
-

Subdivision of Section 26
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 26 and 35.

N. 0°01.3' E., on the N-S centerline of section 26.

- 39.982** Point for the center 1/4 section corner of section 26, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 26
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 2.0 lks. west of a fence line, extending north and south, on gently rolling land, in cheat grass and mixed

SUBDIVISION OF SECTION 26
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

green plants.

79.975 The 1/4 section corner of sections 23 and 26.

From the 1/4 section corner of sections 25 and 26.

N. 89°52.8' W., on the E-W centerline of section 26.

39.989 The center 1/4 section corner of section 26.

79.947 The 1/4 section corner of sections 26 and 27.

Subdivision of Section 27
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of section 27 only.

N. 0°04.5' W., on the N-S centerline of section 27.

40.699 Point for the center 1/4 section corner of section 27, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 27
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in heavy bunch grass and mixed brush.

80.063 The 1/4 section corner of sections 22 and 27.

From the 1/4 section corner of sections 26 and 27.

S. 89°58.6' W., on the E-W centerline of section 27.

39.925 The center 1/4 section corner of section 27.

81.457 The 1/4 section corner of section 27 only.

Subdivision of Section 28
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

SUBDIVISION OF SECTION 28

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

From the 1/4 section corner of sections 28 and 33.

N. 0°34.1' W., on the N-S centerline of section 28.

20.186 Point for the center S 1/16 section corner of section 28.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T27S R10W
C
S 1/16 | S28
C
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in sandy soil, in heavy scattered brush.

40.372 Point for the center 1/4 section corner of section 28, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 28
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in sandy soil, mixed scattered plants and brush.

80.722 The 1/4 section corner of sections 21 and 28.

From the 1/4 section corner of section 28 only.

S. 89°56.5' W., on the E-W centerline of section 28.

40.112 The center 1/4 section corner of section 28.

60.389 Point for the center W 1/16 section corner of section 28.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

SUBDIVISION OF SECTION 28
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

T27S R10W
W 1/16
C ——— C
S 28
2012

Bury a magnet beneath the aluminum post.

Corner is located 19.1 lks. west of the outer edge of the western rail of railroad tracks on the steep, gray gravel covered, west bank of the railway, extending northeasterly and southwesterly through the area.

80.666 The 1/4 section corner of sections 28 and 29.

From the center S 1/16 section corner of section 28.

S. 89°57.5' W., on the E-W centerline of the SW 1/4 of section 28.

40.592 The S 1/16 section corner of sections 28 and 29.

From the center W 1/16 section corner of section 28.

N. 0°31.1' W., on the N-S centerline of the NW 1/4 of section 28.

40.349 The W 1/16 section corner of sections 21 and 28.

Subdivision of Section 29
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 29 and 32.

N. 0°07.6' W., on the N-S centerline of section 29.

40.260 Point for the center 1/4 section corner of section 29 at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 29
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located 5.4 lks. east of a barbed-wire fence line,

SUBDIVISION OF SECTION 29

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

extending north and south, near the western edge of an old dry pond and marsh lands.

80.676 The 1/4 section corner of sections 20 and 29.

From the 1/4 section corner of sections 28 and 29.

S. 89°58.4' W., on the E-W centerline of section 29.

40.597 The center 1/4 section corner of section 29.

80.796 The 1/4 section corner of sections 29 and 30.

Subdivision of Section 31

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

From the 1/4 section corner of sections 6 and 31, on the south boundary of the township, hereinbefore described.

N. 0°07.7' E., on the N-S centerline of section 31.

40.323 Point for the center 1/4 section corner of section 31, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 29 1/2 inches in the ground, with aluminum cap marked

T27S R10W

C 1/4

S 31

2012

Set a steel fence post 1 ft. north and buried a magnet at the base of the aluminum post.

Corner is located in the southwest region of the fenced Milford Airport, in thick scattered brush.

From this corner point, a U.S. Coast and Geodetic Survey Benchmark, a brass cap marked: D332 1945; lying loosely alongside a crumbly 8 1/2 inches square block of concrete, N. 69° E., 50 lks. distance from the aluminum post.

80.771 The 1/4 section corner of sections 30 and 31.

From the 1/4 section corner of sections 31 and 32.

S. 89°57.2' W., on the E-W centerline of section 31.

40.258 The center 1/4 section corner of section 31.

SUBDIVISION OF SECTION 33

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

- 80.364** The 1/4 section corner of section 31 only, on the west boundary of the township, hereinbefore described.

Subdivision of Section 33
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 4 and 33, on the south boundary of the township, hereinbefore described.

N. 0°59.4' E., on the N-S centerline of section 33.

- 20.271** Point for the center S 1/16 section corner of section 33, not monumented.

- 40.542** Point for the center 1/4 section corner of section 33, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T27S R10W

C 1/4

S 33

2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on the south end of rolling hills, on gently rolling land, in thick cheat grass and sagebrush.

- 80.884** The 1/4 section corner of sections 28 and 33.

From the 1/4 section corner of sections 33 and 34.

S. 89°57.6' W., on the E-W centerline of section 33.

- 20.181** Point for the center E 1/16 section corner of section 33, not monumented.

- 40.362** The center 1/4 section corner of section 33.

- 60.513** Point for the center W 1/16 section corner of section 33.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W

W 1/16

C ——— C

S 33

2012

SUBDIVISION OF SECTION 33
TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.
CHAINS

Bury a magnet at the base of the aluminum post.

Corner is located 0.9 lks. east of a barbed-wire fence line, extending north and south, 10.5 lks. north of an intersection of barbed-wire fences, extending north, south, and west, on generally flat ground, in scattered sagebrush.

From this corner point, a rebar of unknown origin, 1/2 inch diameter, firmly set, projecting 5 inches above the ground, S. 87°39'57" W., 0.4 lks. distance.

80.664 Point for the 1/4 section corner of sections 32 and 33.

From the E 1/16 section corner of sections 4 and 33, on the south boundary of the township, hereinbefore described.

N. 0°32.0' E., on the N-S centerline of the SE 1/4 of section 33.

20.231 Point for the SE 1/16 section corner of section 33 at the intersection with the E-W center line of the SE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
SE 1/16
S 33
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in cheat grass and heavy brush.

40.460 Point for the center E 1/16 section corner of section 33.

From the S 1/16 section corner of sections 33 and 34.

S. 89°51.0' W., on the E-W centerline of the SE 1/4 of section 33.

20.340 The SE 1/16 section corner of section 33.

40.683 Point for the center S 1/16 section corner of section 33.

From the W 1/16 section corner of sections 4 and 33, on the south boundary of the township, hereinbefore described.

SUBDIVISION OF SECTION 33

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

N. 0°45.3' E., on the N-S centerline of the SW 1/4 of section 33.

- 40.445 The center W 1/16 section corner of section 33.
-

From the center W 1/16 section corner of section 33.

N. 0°45.2' E., on the N-S centerline of the NW 1/4 of section 33.

- 40.345 The 1/4 section corner of sections 28 and 33.
-

Subdivision of Section 34

Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 3 and 34, on the south boundary of the township, hereinbefore described.

N. 1°09.7' W., on the N-S centerline of section 34.

- 40.198 Point for the center 1/4 section corner of section 34, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 34
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, with thick grass, native plants, and sagebrush.

- 60.297 Point for the center N 1/16 section corner of section 34.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
C
N 1/16 | S34
C
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

SUBDIVISION OF SECTION 34

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

Corner is located on gently rolling land, in scattered native plants.

79.837 The 1/4 section corner of section 34 only.

From the 1/4 section corner of sections 34 and 35.

N. 89°35.2' W., on the E-W centerline of section 34.

20.826 Point for the center E 1/16 section corner of section 34.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 22 inches in the ground, with aluminum cap marked

T27S R10W
E 1/16
C ——— C
S 34
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in cheat grass and mixed plants.

40.803 The center 1/4 section corner of section 34.

81.557 The 1/4 section corner of sections 33 and 34.

From the center E 1/16 section corner of section 34.

N. 1°11.9' W., on the N-S centerline of the NE 1/4 of section 34.

20.052 Point for the NE 1/16 section corner of section 34, at the intersection with the E-W center line of the NE 1/4.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 24 inches in the ground, with aluminum cap marked

T27S R10W
NE 1/16
S 34
2012

Set a steel fence post alongside and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in very thick cheat and bunch grass.

SUBDIVISION OF SECTION 34

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

39.814 Point for the E 1/16 section corner of section 34 only.

From the point for the N 1/16 section corner of sections 34 and 35.

N. 89°27.0' W., on the E-W centerline of the NE 1/4 of section 34.

21.238 The NE 1/16 section corner of section 34.**41.203** The center N 1/16 section corner of section 34.

From the E 1/16 section corner of sections 3 and 34, on the south boundary of the township, hereinbefore described.

N. 1°11.3' W., on the N-S centerline of the SE 1/4 of section 34.

40.083 The center E 1/16 section corner of section 34.

From the center N 1/16 section corner of section 34.

N. 89°26.7' W., on the E-W centerline of the NW 1/4 of section 34.

40.318 The N 1/16 section corner of section 34 only.

Subdivision of Section 35
Township 27 South, Range 10 West, Salt Lake Meridian, Utah.

From the 1/4 section corner of sections 2 and 35, on the south boundary of the township, hereinbefore described.

N. 0°03.6' W., on the N-S centerline of section 35.

39.984 Point for the center 1/4 section corner of section 35, at the intersection with the E-W centerline.

Set an aluminum post, 30 inches long, 2 1/2 inches diameter, 23 inches in the ground, with aluminum cap marked

T27S R10W
C 1/4
S 35
2012

Set a steel fence post 1.5 lks. north and buried a magnet at the base of the aluminum post.

Corner is located on gently rolling land, in short cheat grass

SUBDIVISION OF SECTION 35

TOWNSHIP 27 SOUTH, RANGE 10 WEST, SALT LAKE MERIDIAN, UTAH.

CHAINS

and tall bunch grass.

79.901 The 1/4 section corner of sections 26 and 35.

The 1/4 section corner of sections 35 and 36, monumented with an iron post, 1 inch diameter, firmly set, projecting 5 inches above the ground, with brass cap marked as described in the official record of the 1911 survey, with a steel fence post alongside.

Corner is located in the middle of a draw, extending easterly and westerly, in mixed native plants and grasses and thinly scattered sagebrush.

N. 89°59.2' W., on the E-W centerline of section 35.

39.974 The center 1/4 section corner of section 35.

79.938 The 1/4 section corner of sections 34 and 35.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

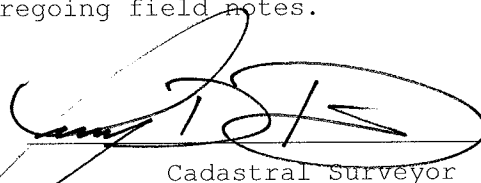
FIELD ASSISTANTS

Name	Capacity
Jacob Murdoch	Survey Technician
Luke Stoddard	Survey Technician

CERTIFICATE OF SURVEY

I, *Jeremy D. Davis, Cadastral Surveyor*, HEREBY CERTIFY upon honor, that in pursuance of Special Instructions bearing the date of the *June 12, 2012*, I have *dependently resurveyed a portion of the south, east, and west boundaries, a portion of the subdivisional lines, and the subdivision of sections 3, 5, 6, 17, 19, 20, 21, 22, 26, 27, 28, 29, 31, 33, 34, 35, in Township 27 South, Range 10 West, of the Salt Lake Meridian, in the State of Utah*, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said Special Instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

July 24, 2014
Date

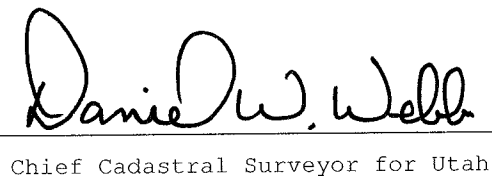

Cadastral Surveyor

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT
Salt Lake City, Utah

The foregoing field notes of the *dependent Resurvey of a Portion of the south, east, and west boundaries, a portion of the subdivisional lines, and the subdivision of sections 3, 5, 6, 17, 19, 20, 21, 22, 26, 27, 28, 29, 31, 33, 34, 35, in Township 27 South, Range 10 West, Salt Lake Meridian, Utah*, executed by *Jeremy D. Davis, Cadastral Surveyor*, having been critically examined and found correct, are hereby approved.

September 30, 2014
Date


Chief Cadastral Surveyor for Utah